


# PRODUCTION OF CHALCOGENIDE GLASS CONTAINING RARE EARTH METAL ION

**Patent number:** JP6122523  
**Publication date:** 1994-05-06  
**Inventor:** FUJIURA KAZUO; OISHI YASUTAKE  
**Applicant:** NIPPON TELEGRAPH & TELEPHONE  
**Classification:**  
- **International:** C03B19/14; C03B37/014; C03B19/00; C03B37/014; (IPC1-7): C03B8/04; C03C3/32  
- **European:** C03B19/14B; C03B37/014B  
**Application number:** JP19920269211 19920914  
**Priority number(s):** JP19920269211 19920914

Report a data error here

## Abstract of JP6122523

**PURPOSE:**To obtain a glass having low transmission loss and easily controllable fiber structure by mixing a glass-forming gas with a alpha-diketone complex of a rare earth element and reacting in vapor phase or on a substrate. **CONSTITUTION:**Two or more kinds of gases selected from halides, hydrides, organometallic compounds, alkoxides and beta-diketone complexes of S, Se, Te, As, P, Sb, Ga, Si, Al and Ge are mixed with gas of a beta-diketone complex of a rare earth element and the gases are made to react with each other in vapor phase or on a substrate to obtain the objective glass. For example, AsCl3 (in a bubbler 2), H2S and a beta-diketone complex of Pr (in a bubbler 3) are supplied through an MFC (mass flow controller) to a reaction chamber 8 containing a quartz substrate 6 heated at a prescribed temperature (e.g. 200-300 deg.C) with a substrate heater 7 and the components are made to react with each other at about 250 deg.C under a pressure of about 100Torr for about 1hr to form a glass film having a thickness of about 100nm on the quartz.

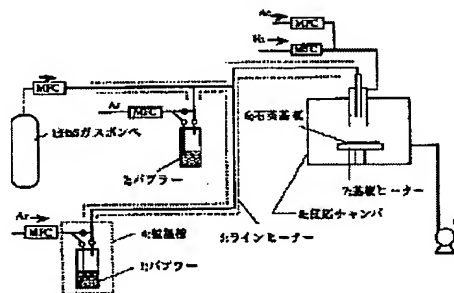

Data supplied from the esp@cenet database - Worldwide